



Contributing To Healthy Life



PRODUCT RANGE:-

- Oxygen Concentrator Series
- CPAP/ BIPAP Series
- Power Wheel Chair Series



EVOX


Contributing To Healthy Life

OC SERIES

MULTI-FUNCTIONAL OXYGEN CONCENTRATOR

Focus On Medicalcare O2 Solutions!

All For Stability



Purity For Surety

Recommendation

- The new EVOX-5S Version is a SmartTouch multifunctional oxygen concentrator
- It has been specially developed to provide a dependable, convenient source of supplemental oxygen for therapeutic needs.
- Includes Nebulizer function, Individual nebulizer outlet
- Large LED Display
- Oxygen Purity Display

Suitable for children and adults,EVOX-5 offers concentration up to 96% and flow rates reaching 5LPM.

Technical specifications

System Map	Function	EVOX-5S	EVOX-5
Oxygen Generating System	Oxygen Flow	0.5~5L/min	0.5~5L/min
	Oxygen Concentration	93%+3%	93%+3%
	Oxygen Output Pressure	0.04-0.07Mpa	0.04-0.07Mpa
	Oxygen Number Display	YES	NO

Nebulize System	Nebulize Mode	YES	-
	Individual Nebulizer Outlet	YES	-
	Display Method	On LED screen	-
	Operating Way	By touch panel button	-
	Accessories	Nebulize nozzle and mask	-
	Nebulizing particle Size	3.6um±25%	-

Screen Display System	Display Material	All by LED lights
	What Can Be Displayed ?	"Oxygen" light on
		"Nebulize" light on
		"Oxygen Percentage" light on
		"Each Runing Time" light on
		"Accumulated Time" light on
		"Timer Setting Number"

Operating System	Operating Panel	Smart Touch
	OXYGEN	Start to produce Oxygen
	NEBULIZE	Start to run Nebulizer
	TIMER "+" and "-"	Seting from 0 to 3 hours (15mins increase or decrease)

Safety System	Low Oxygen Alarm	Yes
	Oxygen Pressure Protection Alarm	Yes
	Pressure Faulty Alarm	Yes
	Power off Alarm	Yes
	Compressor Faulty Alarm	Yes
	Overheated Protection	Yes

Electrical System	Power Consumption	350 W
	Auto Power off by timer	YES
	Screen Sleep Mode	YES
	Noise Level	<46dB(A)

Packing	Machine Body Size	380x270x580mm
	Package Size	460x350x680mm
	Net Weight	15.6kg
	Gross Weight	19kg
	Body Material	ABS, Glaze


Optional Functions	Remote Control	Optional
	Voice Guide System	Optional



Contributing To Healthy Life

5L OXYGEN CONCENTRATOR WITH BATTERY BACKUP

Inverter Technology
World's No.1

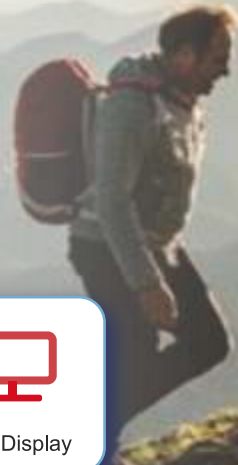


Purity For Surety



Lithium Battery
DC 24V

5
5 Liter



93%
±3%
2
Oxygen Purity



Timer



Accumulated
hours



LED Display

◆ Special Features only provided by EVOX-5SB With Inverter Technology

- ◆ The world's first battery operated 5LPM@93% Oxygen Concentrator
- ◆ The world's NO. 1 Oxygen Output Purity Fluctuation rate controlled within 0.1%.
- ◆ Automatic heavy humidity remove molecular sieve
- ◆ Independent Oxygen outlet & nebulizer outlet system
- ◆ Child Lock settings

◆ Technical Specifications

System Map	Functions	Battery Operated
Oxygen Driving System	Oxygen Flow	0.5~5L/min
	Oxygen Concentration	93% +3%
	Oxygen Output Pressure	0.04-0.07Mpa
	Oxygen Number Display	YES
Electrical System	Rechargeable Battery Position	At back, separatable, replaceable
	Power Consumption	DC24V, 350 W
	Adapter Power	AC 220V Input, DC 24V Output
	Lithium Batteries (If new)	1 set, DC 24V Full charge time about 0.5 hour Support use time 1 hours
	Noise Level	<43dB(A)
Screen Display System	Display Material	All by LED lights
	What Can Be Displayed ?	"Oxygen" light on
		"Nebulize" light on(If any)
		"Purity Percentage" light on
		"Each Running Time" light on
		"Accumulated Time" light on
		"Timer Setting Minutes"
Operating System	Operating Panel	E- Touch
	OXYGEN	Start to produce Oxygen
	NEBULIZE	Start to run Nebulizer(If any)
	TIMER "+" and "-"	Setting from 0 to 3 hours (15mins increase or decrease)
6 Safety System	Low Oxygen Alarm	Yes
	Oxygen Pressure Protection Alarm	Yes
	Pressure Faulty Alarm	Yes
	Power off Alarm	Yes
	Compressor Faulty Alarm	Yes
	Overheated Protection	Yes



Contributing To Healthy Life

SINGLE & DOUBLE FLOW OXYGEN CONCENTRATOR

Focus On Medicalcare O2 Solutions!

All For Stability



DOUBLE FLOW

SINGLE FLOW



FEATURES

- 1 The best touch operate multi-functional units
- 2 All can be with 93%±3% oxygen purity output
- 3 Oxygen Purity Display by Numbers (Accuracy 00.0%)
- 4 Timer
- 5 Large 6 LED Display all functional data
- 6 Accumulated total running hours

◆ Special Features only provided by EVOX Technology

The world's NO. 1 Oxygen Output Purity Fluctuation rate controlled within 0.1%.

Automatic heavy humidity remove molecular sieve

Durable use for environment areas at high temperature (45°C , high altitude (4500m).

◆ Technical specifications

System Map	Functions	Specifications
Oxygen Driving System	Oxygen Flow	10L/15L/20L/30L/40L/60L/100L/ Per Minute
	Oxygen Concentration	93%+3%
	Oxygen Output Pressure	0.04-0.07Mpa
	Oxygen number Display	Yes
Screen Display System	Display Material	All by LED lights
	What Can Be Displayed ?	"Oxygen" light on
		"Nebulize" light on (If any)
		"Purity Percentage" light on
		"Each Running Time" light on
		"Accumulated Time" light on
"Timer Setting Minutes"		
Operating System	Operating Panel	E-Touch
	OXYGEN	Start to produce oxygen
	NEBULIZE	Start to run Nebulizer (If Any)
	TIMER"+ and “	Setting from 0 to hours (15 Mins increase or Decrease)
6 Safety System	Low Oxygen Alarm	Yes
	Oxygen Pressure Protection Alarm	Yes
	Pressure Faulty Alarm	Yes
	Power off Alarm	Yes
	Compressor Faulty Alarm	Yes
	Overheated Protection	Yes
Packaging Details	Machine Body Size	5L: 540x540x660mm 8L: 680x560x860mm, 10L: 680x560x860mm 15L: 680x680x860mm, 20L: 680x680x860mm 40L: 680x680x1200mm
	Import Carton Size	5L: 580x580x720mm 8L: 720x620x960mm, 10L: 720x620x960mm 15L: 720x720x960mm, 20L: 720x720x960mm 40L: 720x720x1400mm
	Net Weight per Unit	5L: 32kgs 8L: 48kgs 10L: 58kgs 15L: 95kgs 20L: 106kgs 40L: 192kgs
	Import Gross Weight per Carton	5L: 46kgs 8L: 64kgs 10L: 76kgs 15L: 116kgs 20L: 132kgs 40L: 225kgs



Contributing To Healthy Life

HIGH PRESSURE OXYGEN CONCENTRATOR 5L/8L/10L/15L/20L/40L/100L~ Any Options



FEATURES

- ① Oxygen Pressure is adjustable from 0.14 Mpa to 0.6 (1.4bar to 6bar)
 - ② All can be with 93%±3% oxygen purity output
 - ③ Oxygen Purity Display by Numbers (Accuracy 00.0%)
 - ④ Large 6' LED Light Display all functional data
 - ⑤ Accumulated total running hours
 - ⑥ With wheels, easy movable
- ◆ Special Features only provided by EVOX Technology

The world's NO. 1 Oxygen Output Purity Fluctuation rate controlled within 0.1%.

Automatic heavy humidity remove molecular sieve


Durable use for environment areas at high temperature (45°C , high altitude (4500m).

System Map		Specifications
Screen Display System	Display Material	All by LED lights
	What Can Be Displayed ?	"Oxygen" light on
		"Purity Percentage" light on
		"Each Running Time" light on
		"Accumulated Time" light on
Operating System	On/Off	Start to produce Oxygen
	Pressure Valve	Adjust oxygen output pressure
	Pressure Gauge	Show current oxygen output pressure (Mpa)
	Flow Meter	Adjust oxygen flow (L/minute)
6 Safety System	Low Oxygen Alarm	Yes
	Oxygen Pressure Protection Alarm	Yes
	Pressure Faulty Alarm	Yes
	Power off Alarm	Yes
	Compressor Faulty Alarm	Yes
	Overheated Protection	Yes
		5L: 540x540x660mm 8L: 680x560x860mm,
Packaging Details	Machine Body Size	10L: 680x560x860mm 15L: 680x680x860mm, 20L: 680x680x860mm 40L: 680x680x1200mm
	Import Carton Size	5L: 580x580x720mm 8L: 720x620x960mm, 10L: 720x620x960mm 15L: 720x720x960mm, 20L: 720x720x960mm 40L: 720x720x1400mm
	Net Weight per Unit	5L: 32kgs 8L: 48kgs 10L: 58kgs 15L: 95kgs 20L: 106kgs 40L: 192kgs
	Import Gross Weight per Carton	5L: 46kgs 8L: 64kgs 10L: 76kgs 15L: 116kgs 20L: 132kgs 40L: 225kgs



Contributing To Healthy Life

CPAP / BIPAP SERIES

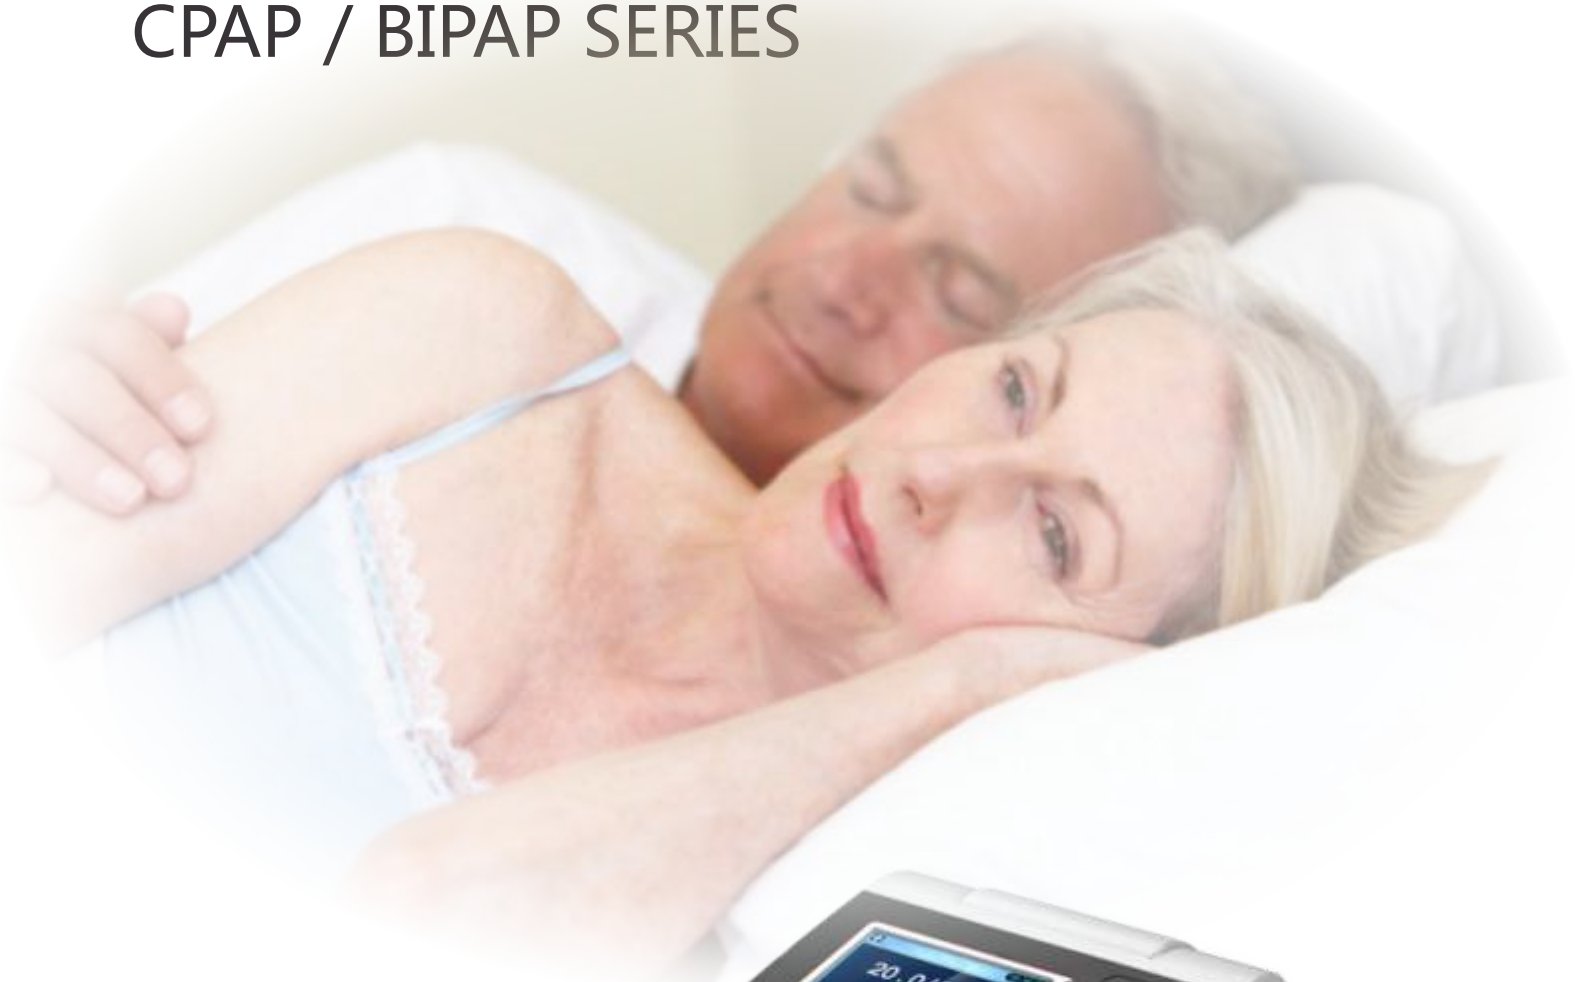

For Sleep Apnea Hypopnea
Syndrome(SAHS)



Technical Data



	CPAP-C09	BIPAP-B19
	C09	B19
Mode		
CPAP	✓	✓
Auto CPAP	✓	
S		✓
T		✓
S/T		✓
Parameters		
Pressure Range	4-20 cmH2O	4-25cmH2O
Belex	2-4cmH2O	2-4cmH2O
Ramp	0-60 min	0-60 min
Esens (1-6 levels)		✓
Isens (1-6levels)		✓
Auto-leak Compensation	✓	✓
Auto-altitude Adjustment	✓	✓
Auto-On/Off	✓	✓
Pressure Titration	✓	
Noise Level (10cmH2O)	<30dBA	<35dBA
Heating Humidifier		
Adjustable Humidify	✓	✓
Replaceable Water Chamber	✓	✓
Data Download		
Data Details	✓	✓
Data Summary	✓	✓
Download to PC	✓	✓

POWER WHEEL CHAIR

EVOX WC-107



- Features:**
- Easy Folding without removing any accessory
 - Very Light in weight
 - Removable Battery box for easy recharging
 - Controller can be fixed on both sides
 - Attendant Controller (Optional)



- Parameters:**
- Driving range : 15-20km
 - Motor: DC 250W*2Pcs
 - Battery: 24V 20Ah (Lithium battery)
 - Parking Brake: **Electromagnetic brake**
 - Frame material: Alumminium alloy
 - Frame Color: ○silver
 - Cushion: ●Black
 - Max Speed: 6km/h

27/28	980	600	950	445	460	460	460	N/A	8	12	100

EVOX WC-101



- Features:**
- .Foldable Dual Operation : Manual and Electric Mode
 - .Removable Battery box for easy recharging
 - .Flip-up armrest, adjustable and detachable footrest
 - .Controller can be fixed on both sides
 - .Handle Height Adjustment (Optional)
 - .Seat Width 18/20 (Optional)
 - .Attendant Controller (Optional)



- Parameters:**
- **Driving range :** 15-20km
 - **Motor:** DC 250W*2Pcs
 - **Battery:** 24V 12Ah (Double Battery)
 - **Parking Brake:** manual brake
 - **Frame material:** steel with liquid painting
 - **Frame Color:** ○ silver
 - **Cushion:** ● Black & red,
 - **Max Speed:** 6km/h



N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
40/46	1090	685	930	450	435	395	500	420	8	22	100



EVOX WC-102

- Features:**
- Foldable Dual Operation : Manual and Electric Mode
 - Removable Battery box for easy recharging
 - Flip-up armrest, adjustable and detachable footrest
 - Controller can be fixed on both sides
 - Attendant Controller (Optional)
 - With Electromagnetic and manual breaks



- Parameters:**
- **Driving range :** 15-20km
 - **Motor:** DC 250W*2Pcs
 - **Battery:** 24V 12Ah (Double Battery)
 - **Parking Brake:** manual & electromagnetic brake
 - **Frame material:** steel with liquid painting
 - **Frame Color:** ○ silver,
 - **Cushion:** ● Blue mess
 - **Max Speed:** 6km/h

N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
41/47	1090	685	930	450	435	395	500	520	8	22	100

EVOX WC-103



- Features:**
- Light weight for easy carrying
 - Foldable Dual Operation : Manual and Electric Mode
 - Removable Battery box for easy recharging
 - Flip-up armrest, adjustable and detachable footrest
 - Controller can be fixed on both sides
 - Attendant Controller (Optional)



- Parameters:**
- Driving range : 15-20km
 - Motor: DC 250W*2Pcs
 - Battery: 24V 12Ah (Lithium Battery)
 - Parking Brake: manual brake
 - Frame material: aluminium alloy
 - Frame Color: Blue
 - Cushion: Blue mesh
 - Max Speed: 6km/h

N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
36/41	1030	685	955	450	435	395	500	415	8	22	100

Features:

- Reclining Electric WheelChair
- Reclining backrest and footrest position can be achieved with remote control
- High performance Taiwan Imported Motor with inbuilt Electromagnetic breaks
- Removable Battery box for easy recharging
- Flip-up armrest, adjustable and detachable footrest
- Controller can be fixed on both sides
- Attendant Controller (Optional)



EVOX WC-104



- Parameters:**
- Driving range : 15-20km
 - Motor: DC 250W*2Pcs
 - Battery: 24V20Ah(Double Battery)
 - Parking Brake: Manual & Electromagnetic brake
 - Frame material: Steel with liquid painting
 - Frame Color: Silver,
 - Cushion: Black
 - Max Speed: 6km/h

N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
57	1215	620	940	450	435	395	500	370	8	12	120



Features:

- Foldable
- Removable Battery box for easy recharging
- Flip-up armrest, adjustable and detachable footrest
- Controller can be fixed on both sides
- Electromagnetic Break (Optional)
- Attendant Controller (Optional)



Parameters:

- **Driving range :** 15-20km
- **Motor:** DC 250W*2Pcs
- **Battery:** 24V20Ah (Double Battery)
- **Parking Brake:** manual & electromagnetic brake
- **Frame material:** steel with liquid painting
- **Frame Color:** ○ silver
- **Cushion:** ● Black & red,
- **Max Speed:** 6km/h



N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
41/46	1140	640	935	450	435	395	500	370	8	12	100

EVOX WC-106

- Features:** Specially designed to withstand 120kg weight bearing
 Foldable Dual Operation : Manual and Electric Mode
 Removable Battery box for easy recharging
 Flip-up armrest, adjustable and detachable footrest
 Controller can be fixed on both sides
 With Electromagnetic and manual breaks
 Attendant Controller (Optional)

- Parameters:**
- **Driving range :** 15-20km
 - **Motor:** DC 250W*2Pcs
 - **Battery:** 24V 20Ah (Double Battery)
 - **Parking Brake:** manual & electromagnetic brake
 - **Frame material:** steel with liquid painting
 - **Frame Color:** ○ silver
 - **Cushion:** ● Black & red,
 - **Max Speed:** 6km/h



N.W. (kg)	overall length(mm)	overall width(mm)	overall height(mm)	seat width(mm)	seat depth(mm)	backrest height(mm)	seat height (mm)	folded width(mm)	front wheel(inch)	rear wheel(inch)	loading capacity(kg)
51	1170	620	940	450	435	395	500	370	8	22	120



EVOX

Contributing To Healthy Life



EVOX

**Plot No. EL-635, Phase-9 Industrial Area
Sector-66A, SAS Nagar (Mohali)**

Punjab-160062

Mob:7526961010,9780392147

M:info@esspeeenterprises.com



www.esspeeenterprises.com